Capacity:

Stage 1: 229 *m Te* (251 *Sh. tonnes*)
Stage 2: 148 *m Te* (163 *Sh. tonnes*)
Stage 3: 81 *m Te* (89 *Sh. tonnes*)

Weight:

Appr. 7000 *kg* / 15432 *lbs*
(ex. oil, reservoir cap: 410 *L* / 108 *USgal*)

Roll Dimensions (1 : 4)

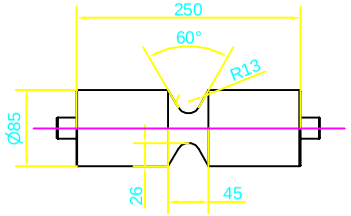

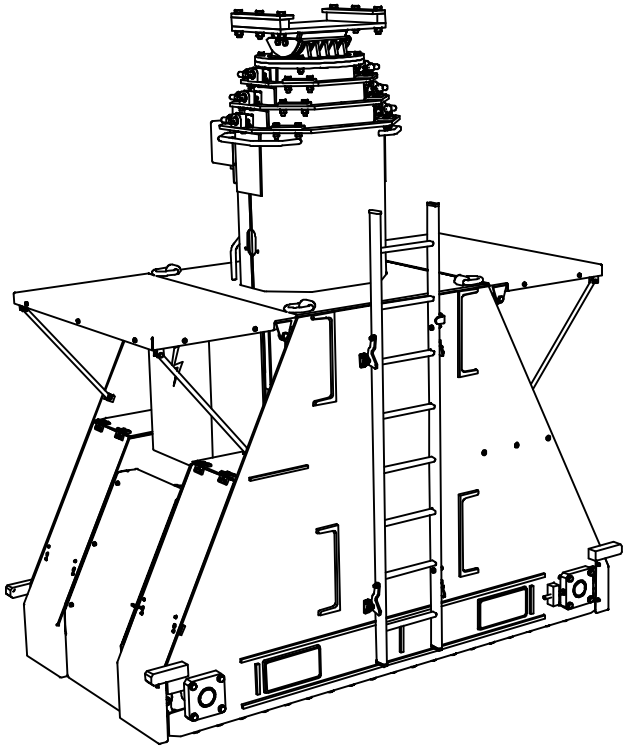

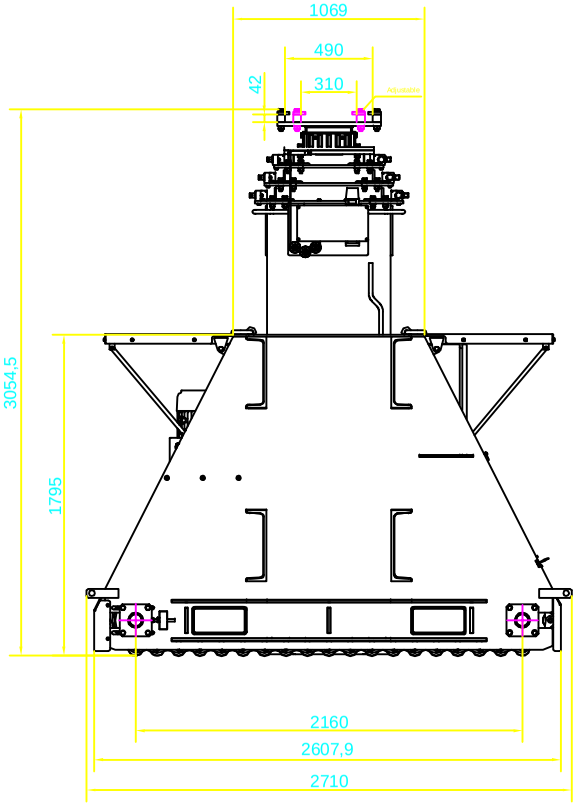

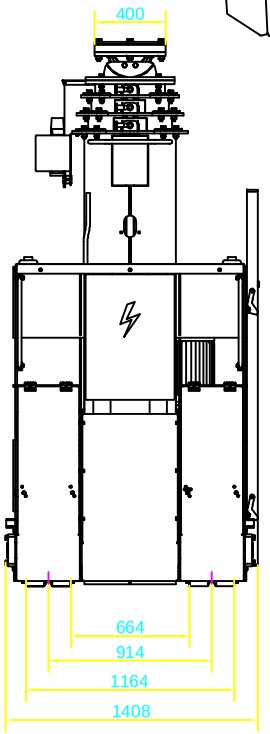

Stage 0



Stage 1
Capacity: 229 metric tonnes
(each unit)

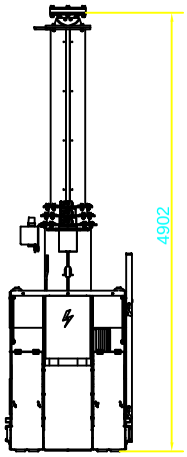

Stage 2
Capacity: 148 metric tonnes
(each unit)

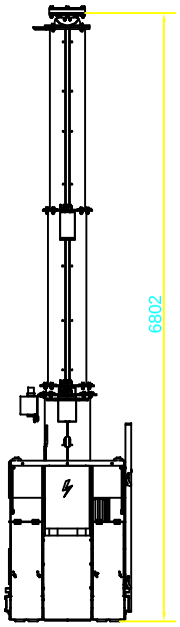

Stage 3
Capacity: 81 metric tonnes
(each unit)

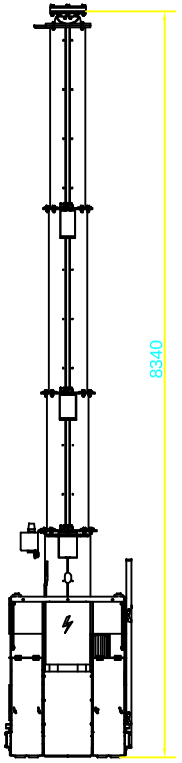

GETEKEND: C. K.	ORDER NUMMER:	MATERIAAL:	VERWIJDER BRAMEN VAN KRUISENDE BORINGEN. SCHERPE KANTEN BREKEN 0.1-0.3 x 45°	TOLERANTIE TENZIJ ANDERS VERMELD: HOEK: ±0, 5° ±0. 5 MAAR:
DATUM: 06-10-2008	SCHAAL: 1: 20	KEUR: Lloyds		
HYDROSPEX — OPAALSTRAAT 44, 7534 TS HENGELO HOLLAND; POSTBUS 481, 7550 AK HENGELO HOLLAND; TELEFOON 074-2422045 FAX 074-2430338; E-MAIL: INFO@HYDROSPEX.NL		RUWHEID ALGEMEEN: 3,2	ONDERDEEL NAAM: SBL1000-SP	
AUTEURSRECHTEN VOORBEHOUDEN VOLGENS DE WET			TEK. NO: 03046. 01. 00. 00	REV: FORM: A2